

SC455

HEAT SHRINK CHAMBER



Compact shrink wrapping system that seals and shrinks in one operation



SC455

HEAT SHRINK CHAMBER

The Optimax SC455 is a manually operated shrink wrapping machine, combining the sealing bar unit with a fully enclosed chamber in which hot air is circulated to seal the film and evenly shrink it around a product.

Suitable for use with single products or for collation of several products in one pack.


Features include:

- > Medium-duty output model
- > Seal and shrink in one operation
- > Very low energy consumption
- > Advanced electronic controls
- > 240V single phase -
requires a minimum 16amp power supply
This model will not operate from a 13A socket
- > Requires 16A supply and connector (not included)
- > Includes separate mobile stand



Specifications

Power supply:	220v/230v/240v, 50/60Hz 16A
Max. power consumption:	3.77kW
Effective power consumption:	1.6-2.3kW
Sealing dimensions:	450 x 550mm (D x L)
Max. height of package:	250mm
Machine dimensions:	1325 x 820mm x 645mm (L x W x H)
Machine weight (without stand):	85kg

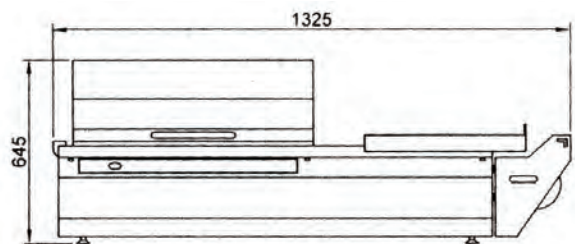

Film Specifications:

Thickness:	60 gauge
Max. roll width:	600mm
Max. outer roll diameter:	250mm
Inside core diameter:	75mm

